

CHART RADAR

<p>Antenna Unit (FAR-3025-NXT) XN12CF 46.2 kg 101.4 lb XN20CF 48.1 kg 106 lb XN24CF 49.3 kg 108 lb</p> <p>XN12CF: 1300±10mm 51.1" XN20CF: 2100±10mm 82.6" XN24CF: 2600±10mm 102.3"</p>	<p>Antenna Unit (FAR-3015/3025) XN12AF 39 kg 86 lb XN20AF 44 kg 97 lb XN24AF 46 kg 101 lb</p> <p>XN12AF: 1260±10mm 49.6" XN20AF: 2040±10mm 80" XN24AF: 2550±10mm 100"</p>	<p>Antenna Unit (FAR-3035S/3035S-NXT) SN36CF 144 kg 317.4 lb</p>	
<p>Monitor Unit MU-270W Bracket Mount 21 kg 46.3 lb</p>	<p>Power Supply Unit PSU-014 8.5 kg 18.7 lb</p>	<p>Power Supply Unit PSU-016 8.5 kg 18.7 lb</p>	
<p>Monitor Unit MU-270W Flush Mount 13 kg 28.7 lb</p>	<p>Power Supply Unit PSU-015 10 kg 22.0 lb</p>	<p>Power Supply Unit PSU-018 10 kg 22.0 lb</p>	
<p>Control Unit RCU-025 2.3 kg 4.4 lb</p>	<p>Trackball Control Unit RCU-026 1.5 kg 3.31 lb</p>		
<p>Processor Unit EC-3005 14 kg 30.9 lb</p>	<p>Intelligent Hub HUB-3000 1.5 kg 3.31 lb</p>		
<p>Sensor Adapter Serial : MC-3000S 1.5 kg 3.3 lb</p>	<p>Analog : MC-3010A 0.8 kg 1.8 lb</p>	<p>Digital In : MC-3020D 0.8 kg 1.76 lb</p>	<p>Digital Out : MC-3030D 0.8 kg 1.76 lb</p>



Models:
FAR-3005 series

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.
Japan | www.furuno.com
FURUNO U.S.A., INC.
U.S.A. | www.furunousa.com
FURUNO PANAMA S.A.
Republic of Panama | www.furuno.com.pa
FURUNO (UK) LIMITED
U.K. | www.furuno.co.uk
FURUNO NORGE A/S
Norway | www.furuno.no

FURUNO DANMARK A/S
Denmark | www.furuno.dk
FURUNO SVERIGE AB
Sweden | www.furuno.se
FURUNO FINLAND OY
Finland | www.furuno.fi
FURUNO POLSKA Sp. z o.o.
Poland | www.furuno.pl
FURUNO DEUTSCHLAND GmbH
Germany | www.furuno.de

FURUNO FRANCE S.A.S.
France | www.furuno.fr
FURUNO ESPAÑA S.A.
Spain | www.furuno.es
FURUNO ITALIA S.R.L.
Italy | www.furuno.it
FURUNO HELLAS S.A.
Greece | www.furuno.gr
FURUNO (CYPRUS) LTD
Cyprus | www.furuno.com.cy

FURUNO SHANGHAI CO., LTD.
China | www.furuno.com/cn
FURUNO CHINA CO., LTD.
Hong Kong | www.furuno.com/cn
FURUNO KOREA CO., LTD
Korea
FURUNO SINGAPORE
Singapore | www.furuno.sg
PT FURUNO ELECTRIC INDONESIA
Indonesia | www.furuno.id

FURUNO ELECTRIC (MALAYSIA) SND. BHD.
Malaysia | www.furuno.my

A-2403LB
Catalogue No. CA000002361

FURUNO FAR-3005 Series Chart Radar offers reliable situational awareness and navigation safety through greatly enhanced target detection

Newly developed antennas with enhanced high durability and reliability



► Newly designed antenna scanners to suppress the aerodynamic drag and prevent a spike in temperature

► Less maintenance required through use of the DC brushless motor

► Ethernet network link between antenna unit and below deck processor unit

The analog signals are converted into the digital signals within the antenna unit and sent to the below deck processor unit via Ethernet network. This network technology eliminates loss of signal gain between antenna unit and processor unit that may be seen in conventional Radar system.

► Optional LAN Signal Converter enables users to extend the cable between antenna unit and processor unit or to utilize the existing cables when retrofitting

Solid State Radar model - NXT - specializes in target detection and maintainability

Compared to the traditional Magnetron Radar, the Solid State Radar NXT Series provide highly reliable target detection while requiring low power.


► Clear images

Furuno Solid State Radar technology generates clear echo images, which allows users to obtain a clear picture of the area around their vessel, including weaker echoes from small crafts.

► Reducing the time and cost for maintenance

- No need to replace the magnetron
- Removal of the consumable parts thanks to a fan-less antenna (S-band only)


Power Amplifier Module of the Solid State transceiver

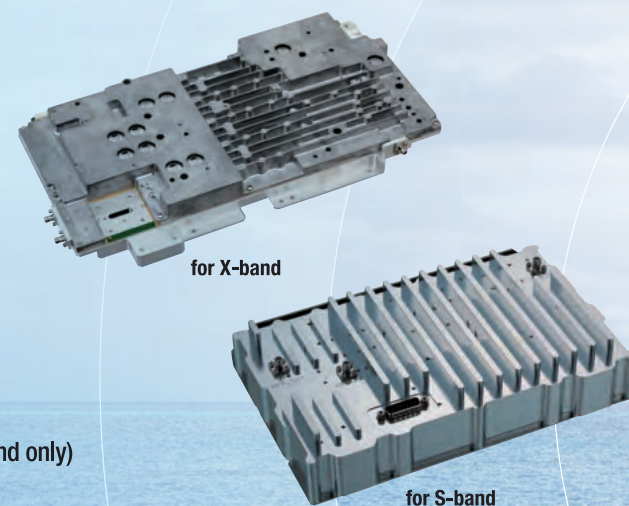

► Automatic Clutter Elimination (ACE) function provides clear echoes

Users can quickly adjust the radar image with a single action. When Automatic Clutter Elimination (ACE) function is activated, the system automatically adjusts the clutter reduction filter and gain control according to the sea and weather conditions selected (Calm/Rough Sea/Hard Rain).

Our advanced echo averaging architecture is also incorporated into Automatic Clutter Elimination (ACE) function. Users can avoid complicated adjustment processes, resulting in clear echo images.

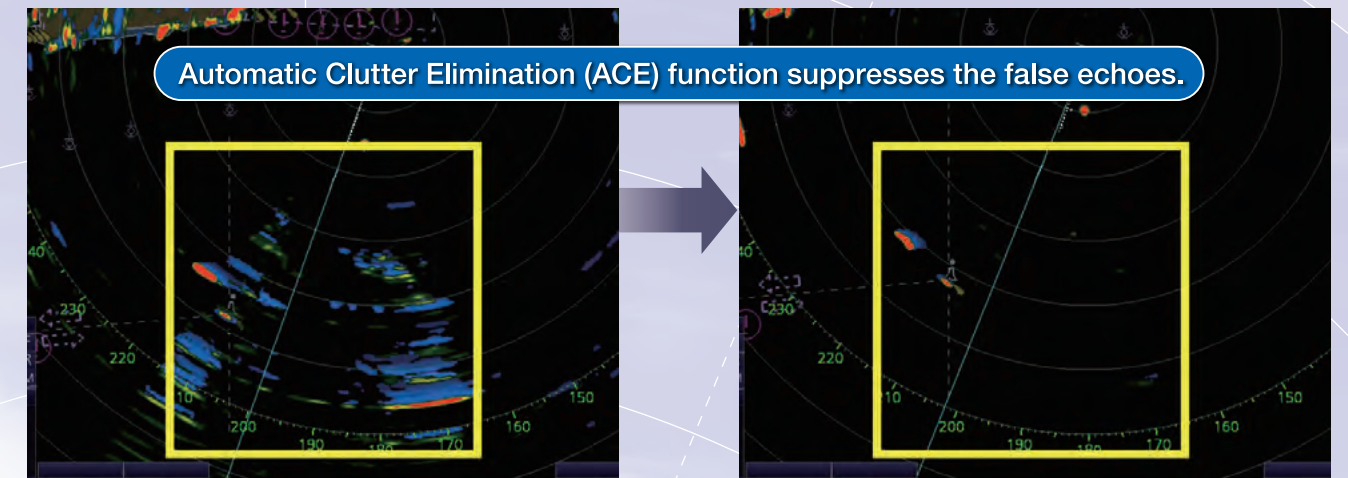


Automatic Clutter Elimination (ACE) OFF

Automatic Clutter Elimination (ACE) ON

► Improved Target Tracking (TT) function

- Target acquisition takes only a few seconds

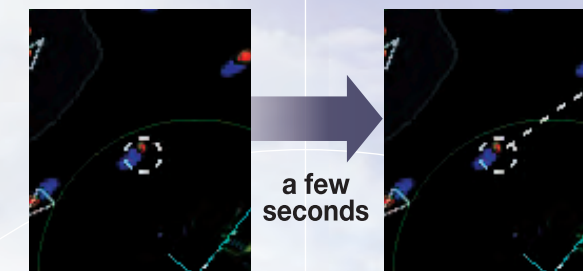

- Acquired target does not jump to adjacent target
- Reliable and stable tracking of high-speed and rapidly maneuvering vessels

► High performance Radar with Cat.1 and Cat.2 support


► Complies with the following regulations:

- IEC 60945 Ed. 4.0
- IEC 61162-1 Ed. 5.0
- IEC 61162-2 Ed. 1.0
- IEC 61162-450 Ed. 2.0
- IEC 61174 Ed. 4.0
- IEC 62288 Ed. 3.0
- IEC 62388 Ed. 2.0
- IEC 62923-1
- IEC 62923-2

Advanced technologies for safer and optimal navigation in all kinds of situations (option)

Wave Analyzer Software *

- Allows real-time monitoring and analysis of wave echoes
- Ensures safety at sea even at night




Wave Information	
ANT-1 X-BAND	▲ Wind
Significant Wave DIR	324.3°
Height	1.7 m Speed 22.2 m/s
▲ 1st Wave	
Height	1.2 m
DIR	122.2°
Period	9.6 sec
▲ 2nd Wave	
Height	0.8 m
DIR	039.2°
Period	9.4 sec

*More details on the Wave Analyzer brochure

Ice Mode ** (X-band magnetron only)

- Find the best route through ice
- Observe ice conditions by Radar

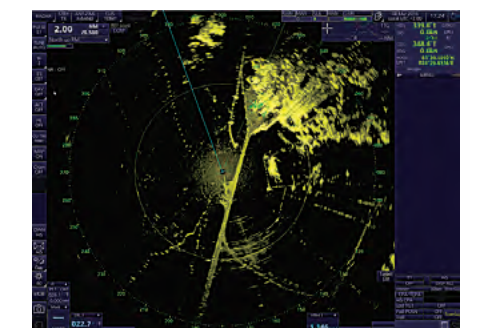


**Please contact your local distributor for more details

Multi Function Display (MFD) capability*

Furuno proposes workstations that combine flexibility and redundancy. Users may easily select ECDIS, Chart Radar, Conning display or Alert Management System at any multi-function display. Navigators will enjoy reduced workload and significant freedom to move about the bridge. All necessary information is available on a variety of displays and at locations that may be altered as required.

*MFD capability is to be implemented as software upgrade

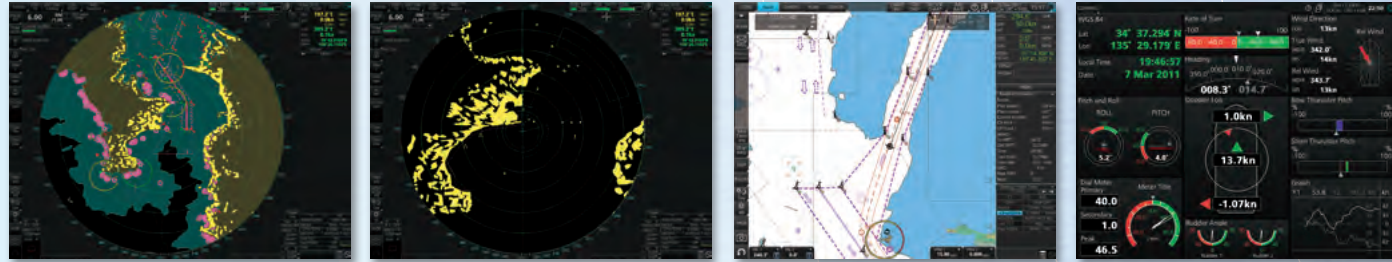

Radar (Chart ON)

Radar (Chart OFF)

ECDIS

Conning Information Display

Sensor Adapter

► Common sensor adaptor makes installation and maintenance easy

The Sensor Adapter acts as a central medium to gather all of the sensor data and collectively feed it to all FAR-3005 Chart Radar and FMD-3200/3300 ECDIS in the network. Since the sensor adapter can be extended to interface with all the sensors within the network, individual cable connections in the sensor-to-Chart Radar/ECDIS interface can be greatly reduced.




Navigation sensors can be directly interfaced with the processor's 8 serial I/O ports. Sensor adapters are required under the following conditions:

- The sensor data is to be shared amongst multiple networked Chart Radar and ECDIS systems,
- The number of sensors interfaced is more than the number of the ports the processor has (8 serial I/O ports, 1 digital IN and 6 digital OUT), and/or
- The networked sensors include analog sensors.

In order to integrate onboard sensors into the navigation network, the sensor adapter may be interfaced with the Intelligent Hub HUB-3000 from which distribution of the sensor data throughout the network is possible. Alternatively, multiple sensor adapters may be interfaced via Ethernet to integrate onboard sensors for use in the shipboard network.

System diagram for the new Chart Radar

Model: FAR-3005

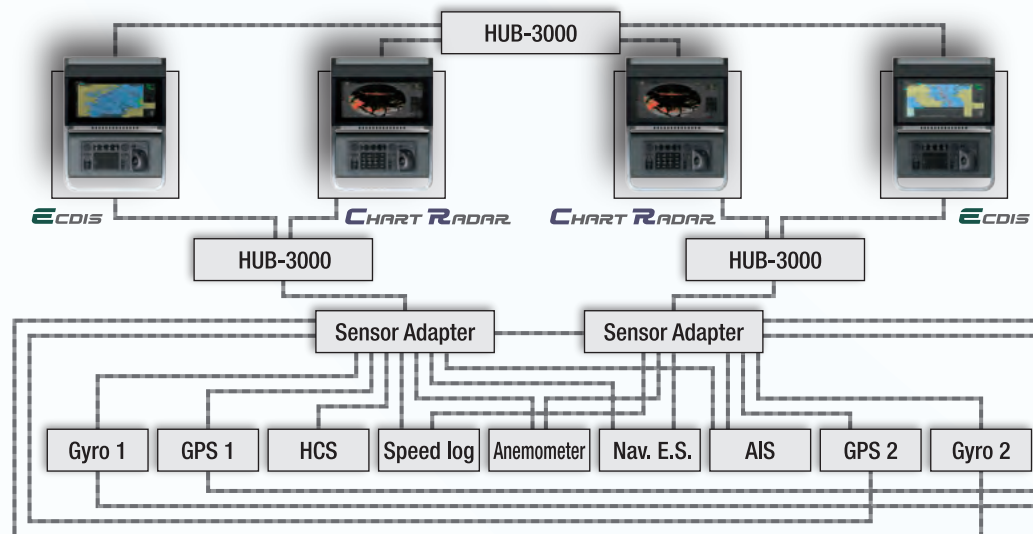

FURUNO's new user interface delivers straightforward operation

Unique & smart operation tool – “Status bar” and “InstantAccess bar™”


The user interface of the Radar utilizes carefully organized operational tools: the Status bar and the InstantAccess bar™. These operational tools deliver straightforward, task-based operation by which the operator can quickly perform tasks without having to navigate an intricate menu tree.

Status bar

Status bar contains information about the operating status, i.e., MFD operating mode, main tasks assigned to each MFD operating mode.

InstantAccess bar™

InstantAccess bar™ contains all the tasks (functions or actions) corresponding to the operation mode currently selected so that quick access to necessary functions/actions can be made.

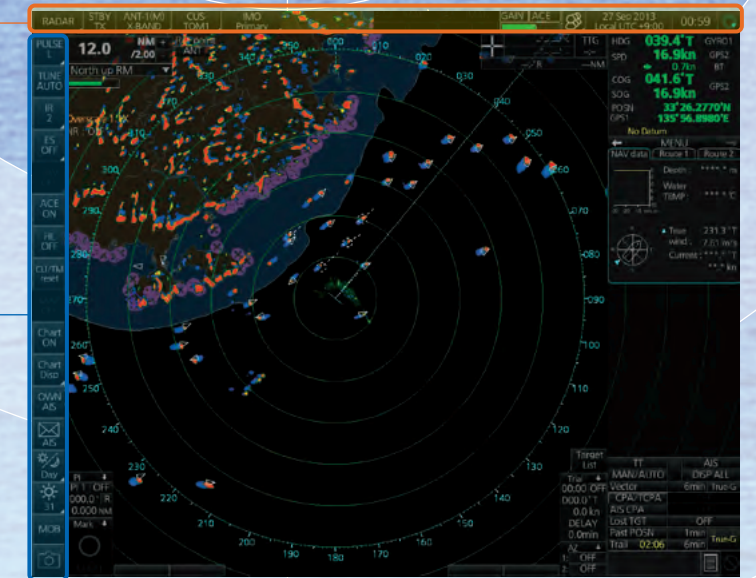

Stress-free operation with the well-designed control unit



Intuitive operation

All operations can be controlled with the trackball.

Contextual menu

The context menu contains all the available actions related to the selected icon or area, it provides quick access to tasks.



SPECIFICATIONS

PRODUCT NAME
MARINE RADAR

GENERAL

Range Scales and Ring Intervals

Range (NM)	0.125	0.25	0.5	0.75	1.5	3	6	12	24	48	96
RI (NM)	0.025	0.05	0.1	0.25	0.25	0.5	1	2	4	8	16
Number of rings	5	5	5	3	6	6	6	6	6	6	6

ANTENNA UNIT

Radiator Type: Slotted waveguide array
Beamwidth and Sidelobe

Antenna Type	X band							S band
	XN12CF	XN20CF	XN24CF	XN12AF	XN20AF	XN24AF	SN36CF	
Antenna Length (cm/ft)	130 / 4.2	210 / 7	260 / 8.5	126 / 4	204 / 6.7	255 / 8.3	383 / 12.6	
Horizontal beam	1.9°	1.23°	0.95°	1.9°	1.23°	0.95°	1.8°	
Vertical beam	20°							25°
Side lobe (±10° or below)	-24 dB	-28 dB	-28 dB	-24 dB	-28 dB	-28 dB	-24 dB	
Side lobe (±10° or above)	-30 dB	-32 dB	-32 dB	-30 dB	-32 dB	-32 dB	-30 dB	

TRANSCIVER UNIT

● Frequency and radio wave type

X band (Magnetron)	9410 MHz ± 30 MHz, P0N
S band (Magnetron)	3050 MHz ± 30 MHz, P0N
X band (Solid-state)	CH1 P0N: 9403.75 MHz/Q0N: 9423.75 MHz ± 5 MHz CH2 P0N: 9413.75 MHz/Q0N: 9433.75 MHz ± 5 MHz
S band (Solid-state)	CH1 P0N: 3043.75 MHz/Q0N: 3063.75 MHz ± 5 MHz CH2 P0N: 3053.75 MHz/Q0N: 3073.75 MHz ± 5 MHz

● Peak Output

FAR-3015	12 kW
FAR-3025	25 kW
FAR-3025-NXT	600 W
FAR-3035S	30 kW
FAR-3035S-NXT	250 W

Range scale, Pulse Repetition Rate and Pulselength

Magnetron radar: FAR-3015/3025/3035S

PRR (Hz approx.)	Range scale (NM)										
	0.125	0.25	0.5	0.75	1.5	3	6	12	24	48	96
3000	S1										
3000	S2										
1500	M1										
1200	M2										
1000	M3										
600*	L										

*: 500 Hz on 96 NM range.

Solid state radar: FAR-3025-NXT

PRR (Hz approx.)	Range scale (NM)										
	0.125	0.25	0.5	0.75	1.5	3	6	12	24	48	96
1500	S1										
1500	S2										
1200	M1										
1000	M2										
1000	M3										
600	L										

Solid state radar: FAR-3035S-NXT

PRR (Hz approx.)	Range scale (NM)										
	0.125	0.25	0.5	0.75	1.5	3	6	12	24	48	96
2400	S1										
2000	S2										
1500	M1										
1060	M2										
1000	M3										
600	L										

PROCESSOR UNIT

Chart Materials
IMO/IHO S57 edition-3 ENC vectorized material (IHO S-63 ENC data protection scheme), C-MAP and CM-93/3 vectorized materials

Data Presentation Own Ship
Own ship's mark and numeral position in lat/lon, speed and course

Target Data(TT: ARPA, AIS)
Range, bearing, speed, course, CPA/TCPA, BCR/BCT
Target information from AIS (waypoint, ship's hull and status)

Position Calculation
Navigation by result from external position sensor
Dead reckoning with gyro and log data from gyro, log, and position sensors to be fed to mathematical filter to generate highly accurate position and speed

Navigation Planning
Planning by rhumb line, great circle

Route Monitoring
Off-track display, waypoint arrival alarm, shallow depth alarm

User Chart
User chart creation and display

Notes Data
Create and display notes data

MOB (Man Overboard)
Position, and other data at time of man overboard are recorded MOB mark is displayed on the screen

DISPLAY UNIT

Screen type	MU-270W
Resolution	27-inch color LCD, 1920 x 1200 (WUXGA)
Brightness	400 cd/m ² typical
Visible distance	1.02 m nominal
Effective diameter	349 mm

INTERFACE

Processor Unit

DVI
2 ports, DVI-D (Video signal from DVI-1 and DVI-2 is identical)
1 port, DVI-I Ver. 1.1 (RGB for VDR)

LAN
2 ports, Ethernet 1000 Base-T (for Interswitch and Sensor Adapter)
1 port, 100 Base-TX (for Radar sensor)

USB
4 ports, USB 2.0 type-A

COM
2 ports, RS232C/RS-485 (for brilliance control)

Serial I/O
8 ports
IEC61162-1/2 (2 ports), IEC61162-1 (6 ports)

Sentences Input
ABK, ACN (ACM), ALC, ALF, ALR, ARC, CUR, DBT, DDC, DPT, DTM, GGA, GLL, GNS, HBT, HCR, HDT, MTW, MWD, MWV, NRM, NRX, NSR, RMC, RRT, SRP, THS, VBV, VDM, VDO, VDR, VHW, VLW, VSD, VTG, ZDA

Output
ABM, ALC, ALF, ALR, ARC, BBM, DDC, EVE, HBT, OSD, RRT, RSD, RTE, SRP, TLB, TTD, TTM, VSD, WPL

Digital Input
1 port (for ACK signal input)

Contact Closure
6 ports
1 port for system fail, 1 port for power fail, 2 ports for normal close, and 2 ports for normal open

Sensor Adapter

Control and Serial Input
LAN
1 port, Ethernet 100 Base-TX
Serial
8 ports
IEC 61162-1/2 (4 ports), IEC 61162-1 (4 ports)

Analog Input
3 ports/per unit, -10 to +10 V/0 to 10 V, 4 to 20 mA selectable

Digital Input
8 ports/per unit, normal close or open, selectable

Digital Output
8 ports/per unit, normal close or open, selectable

POWER SUPPLY

Power Supply Unit
100-230 VAC: 1 phase, 50-60 Hz
FAR-3015 PSU-014: 1.7-0.8 A / PSU-014: 2.5-1.1 A
FAR-3025 PSU-014: 1.8-0.8 A / PSU-014: 2.5-1.2 A
FAR-3025-NXT PSU-014: 1.8-0.9 A / PSU-014: 2.5-1.2 A
FAR-3035S PSU-014: 2.8-1.3 A / PSU-015: 5.1-2.3 A
FAR-3035S-NXT PSU-016: 2.8-1.3 A / PSU-018: 4.7-2.1 A

Processor Unit (EC-3005) 100-115/220-230 VAC: 2.3/1.1 A, 1 phase, 50-60 Hz

Display Unit MU-270W : 100-230 VAC : 0.6-0.4A, 1 phase, 50-60 Hz

Hub 100-230 VAC: 0.1 A, 1 phase, 50-60 Hz
De-icer (option) 100-115/220-230 VAC: 2.6-1.3 A, 1 phase, 50-60 Hz

ENVIRONMENTAL CONDITIONS



Unit	Ambient Temperature	Relative Humidity	Degree of protection	Vibration
Antenna Unit	-25°C to +55°C (storage +70°C)	95% or more at 40°C	IP56	IEC 60945 Ed. 4
Power Supply Unit	-15°C to +55°C		IP22	
Processor Unit		IP20		
Control Unit		IP22		
HUB-3000			IP22	

EQUIPMENT LIST

Standard	Quantity
Display Unit	MU-270W 1 unit
Processor Unit	EC-3005 1 unit
Control Unit	1 unit
Radar Control Unit	RCU-025 1 unit (specify when ordering)
Trackball Control Unit	RCU-026 1 unit
Antenna Radiator	XN12CF/XN20CF/XN24CF XN12CA/XN20AF/XN24AF SN36CF 1 unit
Transceiver	RTR-107/111/123/131/132 1 unit
Gear Box	RSB-128/129/133/146 1 unit
Performance Monitor	PM-32A/32B/52A/52B 1 unit
Power Supply Unit	PSU-014/015/016/018 1 unit
Cable between Power Supply Unit and Antenna Unit	1 pc
LAN Cable between Processor Unit and Power Supply Unit	1 pc
Standard Spare Parts and Installation Materials	1 set
Option	
Sensor Adapter	MC-3000S/3010A/3020D/3030D
Sub Display Radar Cable	RW-00136
De-icer	OP03-226/227/231/232/274
Junction Box (for foremast mounting)	RJB-001
Composite Cable between Junction Box and Antenna/Power Supply Unit (for foremast mounting)	RW-9600
LAN Signal Converter (for foremast mounting)	OP03-223
Intelligent Hub	HUB-3000
Wave Analyzer Software	WW-100/WW-100ST

INTERCONNECTION DIAGRAM

Antenna Units

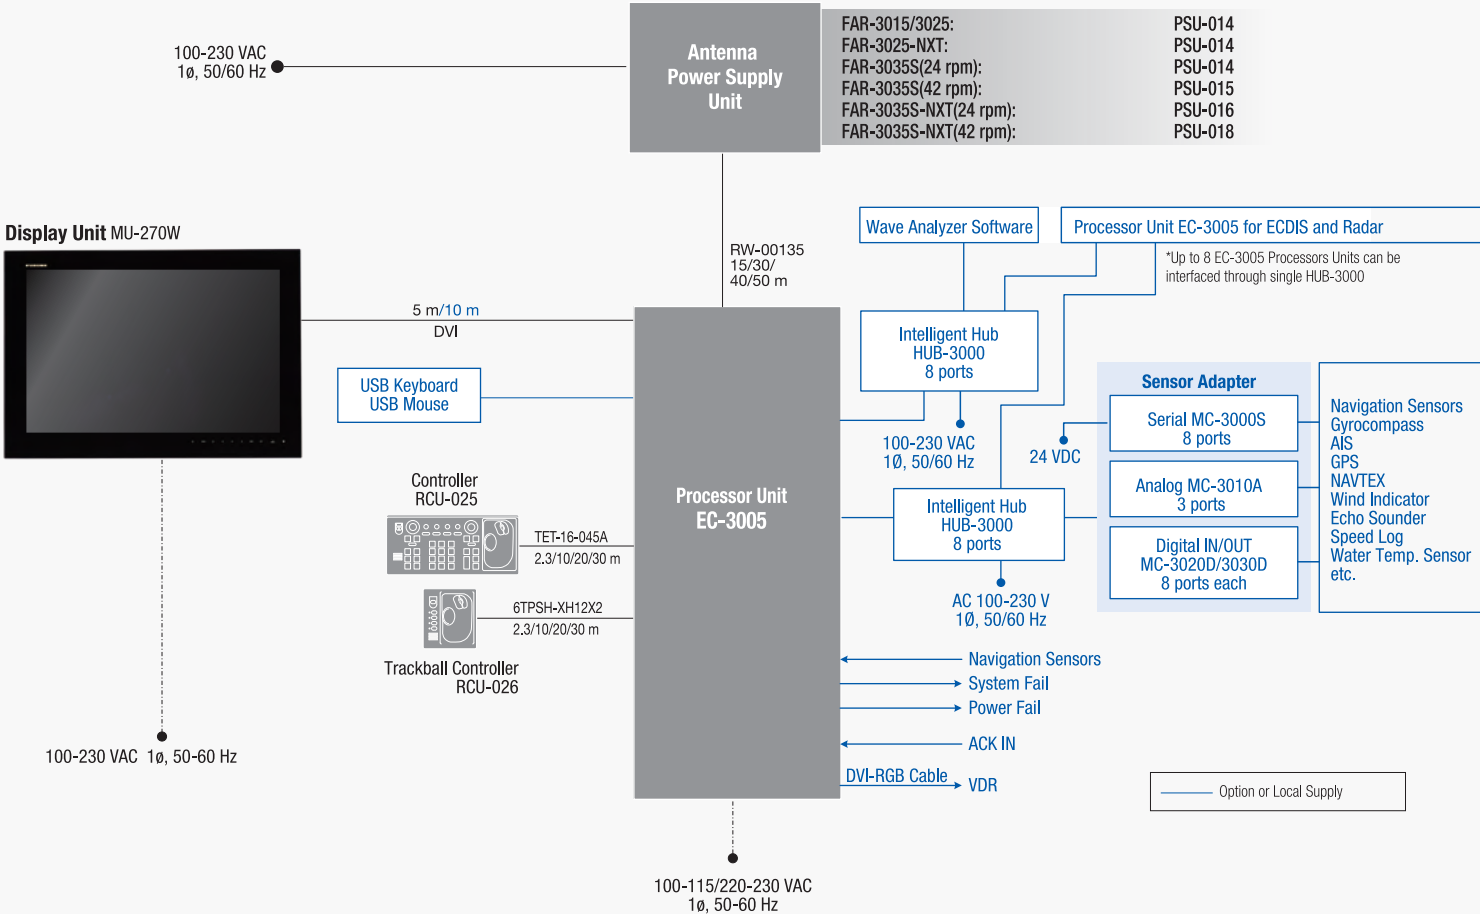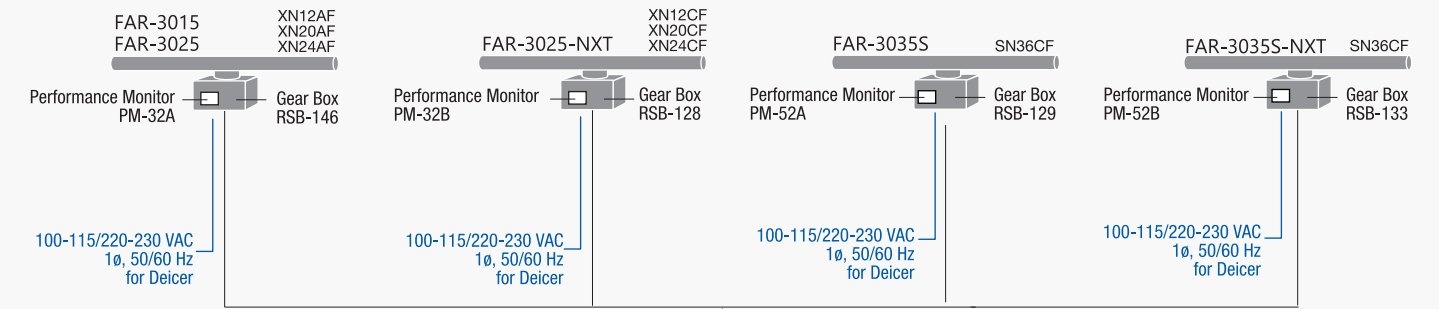

Model	Output Power	Transceiver	Antenna	Rotation	Power Supply	Display
FAR-3015	X band 12 kW	RTR-131	126 cm (XN12AF)	24/42* rpm	PSU-014	27" WUXGA (MU-270W)
FAR-3025	X band 25 kW	RTR-132	204 cm (XN20AF) 255 cm (XN24AF)			
FAR-3025-NXT	X band 600 W	RTR-123	130 cm (XN12CF) 210 cm (XN20CF) 260 cm (XN24CF)	24/42* rpm	PSU-014	27" WUXGA (MU-270W)
FAR-3035S	S band 30 kW	RTR-107	383 cm (SN36CF)	24/42* rpm	PSU-014 (24 rpm) PSU-015 (42 rpm)	27" WUXGA (MU-270W)
FAR-3035S-NXT	S band 250 W	RTR-111	383 cm (SN36CF)	24/42* rpm	PSU-016 (24 rpm) PSU-018 (42 rpm)	27" WUXGA (MU-270W)

* Except for XN24CF

Mackay
Marine Electronics & Satellite Communications
www.mackaymarine.com

Mackay Marine, Global Commercial Sales
+1 281 479 1515 marinesales@mackaymarine.com

Mackay Communications, Satellite Solutions
+1 919 850 3100 satserv@mackaycomm.com

Mackay World Service (MWS) 24/7
+1 282 478 6245 service@mackaymarine.com