

Hughes 9450-C11 BGAN Mobile Satellite Terminal

HUGHES

Mackay
COMMUNICATIONS
www.mackaysatellite.com

inmarsat

Broadband satellite IP terminal and WLAN (Wi-Fi Hot Spot) access point

Customers can now connect at IP broadband speeds of up to 464 kbps while on-the-move using the world's smallest mobile BGAN terminal—the Hughes 9450-C11. The Hughes 9450-C11 terminal is fully approved for operation on Inmarsat's Broadband Global Area Network (BGAN) satellite service and provides high-performance, on-the-move connectivity for the most demanding environments.

The Hughes 9450-C11 is a budget-friendly and highly competitive mobile terminal, ideal for government, first responders, public safety, mobile healthcare, and remote mobile fleet personnel in industries such as utility, oil and gas, forestry, cable, and telecommunications.

Corporate disaster planners and remote field personnel can collaborate reliably and efficiently with various agencies and headquarters staff using video, voice, and data simultaneously. As with all Hughes BGAN models, the Hughes 9450-C11 includes a built-in wireless Wi-Fi access point. The Hughes 9450-C11 terminal is IP-based and offers selectable, dedicated Quality of Service (QoS) levels.



Simple, quick, and flexible options are available for installation on any vehicle. The mini-antenna may be permanently mounted for fleet-style installation or the optional magnetic roof mount can be used for rapid installation and removal. The antenna includes a single, 8 meter RF cable connection.

The Hughes 9450-C11 terminal also has four (4) Ethernet ports with Power over Ethernet (PoE) that allow the user to connect multiple devices. The terminal supports analog and ISDN circuit-switched voice calls, along with fax and 64 kbps ISDN data.



Mackay Communications, Inc.
3691 Trust Drive
Raleigh, NC 27616 USA
Tel: 1-919-850-3100
US Toll: 1-877-4-MACKAY
Fax: 919-954-1707
Email: satserv@mackaycomm.com
www.mackaysatellite.com

For Government buyers or contractors,
contact Mackay Government at:
government@mackaycomm.com
or 904-880-4633

www.hughes.com

Features

- Fully autonomous tracking antenna acquires and tracks the BGAN satellite signal while on-the-move
- Simultaneous use of Ethernet and WLAN for IP data plus RJ-11 or ISDN for voice
 - Four Power over Ethernet (PoE) ports
 - Built-in WLAN access point
 - Two RJ-11 ports; one each for voice and fax
 - ISDN port
- Internal Web User Interface (UI) for configuration and control without the use of LaunchPad
 - Web UI is accessible via Wi-Fi-enabled PC, PDAs, BlackBerrys, and iPhones
- Auto context activation feature allows data connections to be activated without user action
- Multi-user capability (up to 11 simultaneous sessions)

Services

- Up to 464 kbps shared data rate and 128 kbps streaming IP
 - Selectable Quality of Service (32 kbps, 64 kbps, 128 kbps)
- Circuit-switched services: speech (4 kbps), 3.1 kHz audio (64 kbps), ISDN data (64 kbps)*

*3.1 kHz audio and 64 kbps ISDN data are network limited to look angles above 45 degrees

Package Includes

- Hughes 9450-C11 Mobile Satellite Terminal
- Tracking antenna, 8 meter RF cable, and power cable (magnetic mounts are optional)
Note: This cable length can be changed, but the maximum loss must be less than <10 dB at 1.6 GHz.
- User Guide and Installation Guide (see BGAN.Hughes.com for PDFs)

Wi-Fi ENABLED

Technical Specifications


Transceiver

Weight:	2.3 Kg
Dimensions:	46 mm x 281 mm x 234 mm
Humidity:	95% RH at +40° C
Temperature:	-25° C to +55° C operating
Power: Idle:	32 W**
Max:	65 W** (when transmitting)
Input Voltage:	12 V or 24 V systems

**Does not include power supplied to PoE devices

Antenna

Weight:	2.0 Kg
Dimensions:	252 mm x 119 mm
Humidity:	95% RH at +40° C
Temperature:	-25° C to +55° C operating -40° C to +80° C survival
Wind:	125 mph (200 km/h)
Exception for Magnetic Mount:	100 mph (160 km/h)
Water and Dust:	IP56 antenna
Ice:	25 mm non-operational

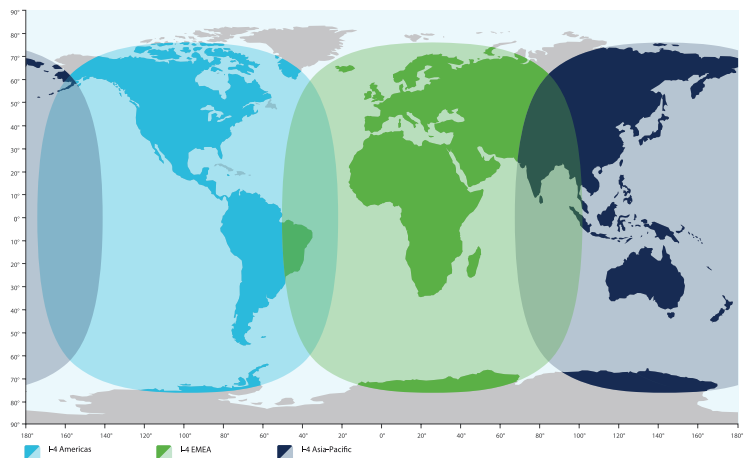

This map depicts Hughes' expectations of coverage post registration of its BGAN services. This map does not represent a guarantee of service. The availability of service at the edge of coverage areas fluctuates depending on various conditions.

For additional information, please contact Hughes at 1-866-569-5153 or email BGANsales@hughes.com.

www.bgan.hughes.com

HUGHES is a registered trademark of Hughes Network Systems, LLC.
All other trademarks are the property of their respective owners.
© 2010 Hughes Network Systems, LLC. All rights reserved. All information is subject to change.

VSAT 371 NOV 10
H44354 ID

HUGHES

11717 Exploration Lane Germantown, MD 20876 USA