



TracPhone® V3HTS

World's fastest, lightest ultra-compact marine VSAT

The rugged 37 cm TracPhone V3HTS offers global connectivity and crystal-clear voice calls via advanced next-generation high-throughput satellites (HTS) from Intelsat and SKY Perfect JSAT on the mini-VSAT Broadband™ HTS network. The result is an ultra-compact SATCOM solution that outperforms the leading competing 60-85 cm Ku-band antennas while offering global metered and regional unlimited use airtime options.

- ① Ultra-high efficiency antenna using KMH's RingFire™ design and groundbreaking dielectric rod feed ensures excellent Ku-band reception even in bad weather
- ② Advanced antenna controller for high-speed tracking
- ③ Dynamic, gyro-stabilized system seeks the optimum satellite within the mini-VSAT Broadband HTS network and tracks it through the full dynamic motion experienced at sea



The powerful ICM, with its high-throughput modem, Voice over IP (VoIP) adapter, versatile network management software, and built-in Wi-Fi and Ethernet, is the streamlined all-in-one belowdecks unit that drives the TracPhone V3HTS.



**Marine Electronics &
Satellite Communications**
www.mackaymarine.com

TracPhone V3HTS with mini-VSAT Broadband HTS Service

System Specifications


Service	
Network	mini-VSAT Broadband HTS Network
Antenna Type	Ku-band
Service Coverage Area	Choice of seamless global or regional coverage options
Maximum Speed Download/Upload ¹	as fast as 5 Mbps/2 Mbps (down/up)
Abovedecks Equipment	
Antenna Dish Diameter	36.8 cm (14.5")
Antenna Unit Dimensions/Weight	39.4 cm D x 44.7 cm h (15.5" D x 17.6" h)/11.3 kg (25 lbs)
Elevation/Azimuth Range	7.7° to 75°/720° rotation
Temperature	Operating: -30°C to 55°C (-22°F to 131°F); Survival: -35°C to 70°C (-31°F to 158°F)
Humidity	IEC 60945; 40°C (104°F), 95% Humidity (non-condensing)
Rain	Precipitation rate of 1.7 mm/min, w/wind speeds up to 100 knots
Heading Input	NMEA 0183 magnetic or true heading
Antenna Unit Power	DC; provided by ICM
ICM to Antenna Unit Communications	14 Conductor Data Cable
L-band RF Cables <i>(customer supplied)</i>	For 5-30 m (15-100 ft.) choose RG-11 For 30-60 m (101-200 ft.) choose LMR-400-75 For 60-100 m (201-325 ft.) choose LMR-600-75
Belowdecks Equipment – Integrated CommBox™ Modem (ICM)	
Dimensions	42.6 cm l x 41.4 cm w x 2U h (16.8" x 16.3" x 2U) rack-mountable with optional mounting provisions ²
Weight	5.1 kg (11.25 lbs)
Temperature	Operating: -15°C to 55°C (5°F to 131°F); Survival: -15°C to 70°C (5°F to 158°F)
Input Power	100-240 VAC, 50-60 Hz auto switching, 250W max
Data Interfaces	4 Ethernet: IEEE 802.3 10BASE-T/100BASE-TX, 100 Mbps; 1 Wi-Fi 802.11; 3 USB ports
Voice Interfaces	1 RJ11 port for VoIP services
System Options	
CommBox Software Bundles Available	Standard or Enterprise Bundles – see "Featured Options" at kvh.com/v3hts for details
KVH OneCare™ Support Program	Available; see kvh.com/onecare for details
Complete System	
Certification	Complies with the essential requirements of Radio Equipment Directive 2014/53/EU, which includes the safety objectives set out in Low Voltage Directive 2014/35/EU and an adequate level of electromagnetic compatibility as set out in EMC Directive 2014/30/EU.
System Warranty ³	Comprehensive 2-year parts, 2-year labor warranty supported by KVH's worldwide Certified Support Network (CSN)
Part Number/MSRP (USD)	01-0418-11/\$17,995

Meets FCC and CE requirements. Exceeds Inmarsat operational, survival, and shock specifications.

¹Published data speeds are maximum speeds and may vary in different regions and under different conditions.

²Optional Belowdecks Mounting Case (Part Number 72-0368) available for vessels without a rack.

³Unless subject to in-country regulations. Restrictions apply. Visit www.kvh.com/warranty for details.

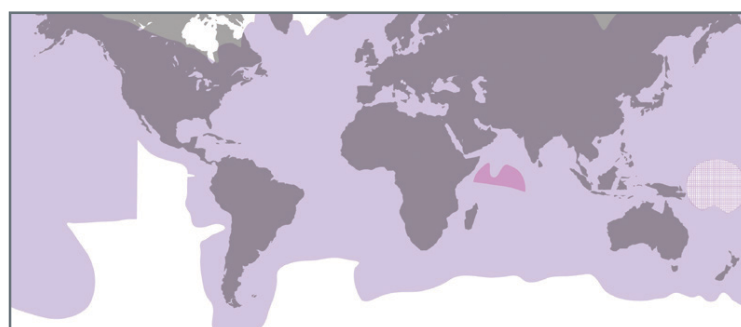

Ku-band Coverage
 Anticipated Future Coverage
 The TracPhone V3HTS is a 2-axis, stabilized antenna that does not provide coverage in areas where the satellite is directly overhead.

mini-VSAT Broadband HTS Network Coverage Map

The TracPhone V3HTS is a two-axis, stabilized antenna that does not provide coverage in areas where the satellite is directly overhead as shown in the hatched areas to the left.

For global and regional coverage maps, visit kvh.com/minivsathtsmaps.


The map depicts KVH's expectations for the mini-VSAT Broadband HTS Network's coverage for the TracPhone V3HTS. Actual coverage and availability may vary. Data rates may also vary in different regions. KVH provides no guarantees of satellite coverage or availability.

System Diagram



Integrated CommBox Modem (ICM) –

Streamlined belowdecks unit includes: IP-enabled antenna control unit, built-in CommBox Ship/Shore Network Manager, high-throughput modem, Voice over IP adapter, and built-in Wi-Fi and Ethernet switch.

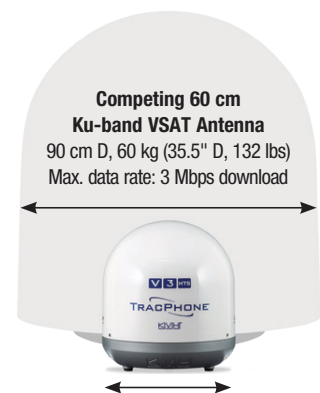

Competing 60 cm Ku-band VSAT Antenna
90 cm D, 60 kg (35.5" D, 132 lbs)
Max. data rate: 3 Mbps download

TracPhone V3HTS
39.4 cm D, 11.3 kg (15.5" D, 25 lbs)
Max. data rate: 5 Mbps download

The TracPhone V3HTS offers data speeds faster than competing, larger Ku-band VSAT systems, all via a rugged, lightweight, easily installed commercial-grade antenna.

kvh.com



World Headquarters
KVH Industries, Inc. · Middletown, RI U.S.A.
+1.401.847.3327 · info@kvh.com

EMEA Headquarters
KVH Industries A/S · Kokkedal, Denmark
+45.45.160.180 · info@emea.kvh.com

Asia-Pacific Headquarters
KVH Industries Pte Ltd. · Singapore
+65.6513.0290 · info@apac.kvh.com

©2018-2021 KVH Industries, Inc. Specifications subject to change without notice. KVH, TracPhone, RingFire, CommBox, KVH OneCare, and the unique light-colored dome with dark contrasting baseplate are trademarks of KVH Industries, Inc. "mini-VSAT Broadband" is a service mark of KVH Industries, Inc. All other trademarks are the property of their respective companies



Mackay Marine – High Seas
+1 281 479 1515 marinesales@mackaymarine.com
Mackay Communications, Satellite Solutions
+1 919 850 3100 satserv@mackaycomm.com

Mackay Marine Canada
+1 902 469 8480 sales.canada@mackaymarine.com
Mackay Marine Alaska & Pacific Northwest
+1 206 282 8080 ballard@mackaymarine.com