




TracPhone[®] V30

The ultra-compact, fast, and affordable VSAT solution

The TracPhone V30 is KVH's ultra-compact maritime VSAT solution. Receive fast, affordable service with your choice of metered and unlimited use airtime plans via next-generation, high-throughput satellites (HTS) from Intelsat with additional coverage from SKY Perfect JSAT. The innovative digital terminal with a 37 cm (14.5") D dish offers higher signal strength and efficiency, an easily installed single-cable, DC-powered design with a compact belowdecks unit, and data speeds as fast as 6/2 Mbps (down/up).

- 1 Ultra-high efficiency antenna using KVH's RingFire[™] design and groundbreaking dielectric rod feed ensures excellent Ku-band reception even in bad weather
- 2 High-performance tracking with 2-axis pedestal design and stabilized skew driven by dual IMUs and high-performance, advanced motor controllers
- 3 Digital antenna design with integrated high-speed modem delivers higher signal strength (no cable loss)
- 4 Commercial-grade rotary joint for unlimited rotation
- 5 Gigabit Ethernet and power over a single coaxial cable for easier and faster installation

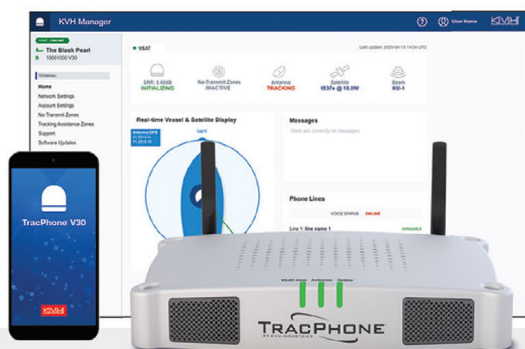

The VSAT-Hub is the streamlined all-in-one belowdecks unit that powers the TracPhone V30. This IP-enabled antenna control unit includes versatile network management software, data routing, and firewall security, plus a Voice over IP (VoIP) adapter, built-in Wi-Fi, and an Ethernet switch. Almost 90% smaller by volume than 2U rack-mounted belowdecks units, it's easier to install and ideal for vessels with limited space.

System Specifications

| Service | |
|--|---|
| Network | mini-VSAT Broadband HTS network |
| Antenna Type | Ku-band |
| Service Coverage Area | Seamless worldwide regions |
| Maximum Speed Download/Upload ¹ | as fast as 6 Mbps/2 Mbps (down/up) |
| Abovedecks Equipment | |
| Antenna Dish Diameter | 36.8 cm (14.5") |
| Antenna Unit Dimensions/Weight | 39.4 cm D x 44.7 cm H (15.5" D x 17.6" H)/10.6 kg (23.4 lbs) |
| Elevation/Azimuth Range | 7.7° to 75°/Unlimited rotation |
| Temperature | Operating: -30°C to 55°C (-22°F to 131°F); Survival: -35°C to 70°C (-31°F to 158°F) |
| Humidity/Salt Fog | IEC 60945; 40°C (104°F), 95% Humidity (non-condensing) |
| Rain | Precipitation rate of 1.7 mm/min, w/wind speeds up to 100 knots |
| Heading Input | NMEA 0183 and NMEA 2000 magnetic or true heading |
| Antenna Unit Power | 48 VDC input from the VSAT-Hub |
| VSAT-Hub to Antenna Unit Connection | Single coaxial cable |
| Belowdecks Equipment – VSAT-Hub | |
| Dimensions | 23.6 cm x 20.5 cm x 4.4 cm (9.34" x 8.05" x 1.73"); will fit in 1U slot |
| Weight | 1.4 kg (3 lbs) |
| Temperature | Operating: -15°C to 55°C (5°F to 131°F); Survival: -25°C to 70°C (5°F to 158°F) |
| Input Power | 10-30 VDC, 125W max |
| Data Interfaces | 4 Ethernet: Gigabit 1000BASE-T IEEE 802.3; 2.4/5GHz IEEE 802.11ac/a/b/g/n 2x2 MIMO Wi-Fi; USB 3.0 Port |
| Voice Interfaces | 1 RJ11 port for VoIP services |
| System Options | |
| KVH OneCare™ Support Program | Available; see kvh.com/onecare for details |
| Complete System | |
| Certification | Complies with the essential requirements of Radio Equipment Directive 2014/53/EU, which includes the safety objectives set out in EN62368-1 and in EMC directive EN60945 FCC Part 15, Subpart B, Class A NMEA 2000 Certified RoHS & REACH |
| System Warranty ² | Comprehensive 2-year parts, 2-year labor warranty supported by KVH's worldwide Certified Support Network (CSN) |
| Part Number/MSRP (USD) | 01-0432-01 / \$11,995 |

Meets FCC and CE requirements. Exceeds Inmarsat operational, survival, and shock specifications.


¹Published data speeds are maximum speeds and may vary in different regions and under different conditions.

²Unless subject to in-country regulations. Restrictions apply. Visit www.kvh.com/warranty for details.

System Diagram



TracPhone V30 Antenna and VSAT-Hub

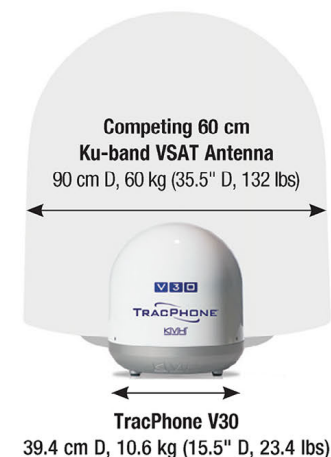

With an antenna that is 55% smaller in diameter and 75% lighter than that of leading competing 60 cm VSAT systems, the commercial-grade TracPhone V30 offers higher or comparable data speeds, but is more affordable, and easier and simpler to install.

mini-VSAT Broadband HTS Network Coverage Map

Ku-band Coverage
 Anticipated 2021 Coverage
 TracPhone V30 has a 2-axis stabilized antenna pedestal design that does not provide coverage in areas where the satellite is directly overhead.

The map depicts KVH's expectations for the mini-VSAT Broadband HTS network's coverage for the TracPhone V30; actual coverage and availability may vary. Data rates may also vary in different regions. Go to www.kvh.com/v30map to view our global coverage maps for TracPhone V30 metered and unlimited use service.

SS_TP30_Comm_Leisure_Land_0421

kvh.com



World Headquarters
KVH Industries, Inc. • Middletown, RI U.S.A.
+1.401.847.3327 • info@kvh.com

EMEA Headquarters
KVH Industries A/S • Kokkedal, Denmark
+45.45.160.180 • info@emea.kvh.com

Asia-Pacific Headquarters
KVH Industries Pte Ltd. • Singapore
+65.6513.0290 • info@apac.kvh.com

©2021 KVH Industries, Inc. Specifications subject to change without notice. KVH, TracPhone, RingFire, KVH OneCare, and the unique light-colored dome with dark contrasting baseplate are trademarks of KVH Industries, Inc. "mini-VSAT Broadband" is a service mark of KVH Industries, Inc. All other trademarks are the property of their respective companies.



Mackay Marine – High Seas
+1 281 479 1515 marinesales@mackaymarine.com
Mackay Communications, Satellite Solutions
+1 919 850 3100 satserv@mackaycomm.com

Mackay Marine Canada
+1 902 469 8480 sales.canada@mackaymarine.com
Mackay Marine Alaska & Pacific Northwest
+1 206 282 8080 ballard@mackaymarine.com