



# IC-M803

MF/HF MARINE TRANSCEIVER

**Long Range Communications  
Beyond the Horizon**



# Class E DSC MF/HF SSB Radio with

## Distress Button for Emergency


If in an emergency situation, press the large independent Distress button to send an automated digital Distress signal. The digital distress signal with GPS coordinates calls for help from other ships or coast stations.




Distress button with a spring-loaded cover

## Built-in DSC Watch-Keeping Receiver with the Multiple Task Mode

The dedicated DSC watch-keeping receiver continuously scans the six distress channels in rotation. A total of 100 MMSI numbers (75 Individual and 25 Group) for DSC calls can be stored with a 10-character ID name. When you receive a DSC call, while you are in process with another DSC call, the IC-M803 can hold both DSC procedures to switch between the DSC calls with the Multiple Task Mode function.

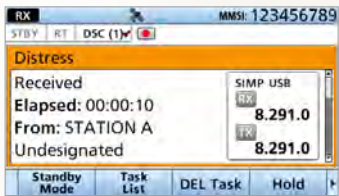

Example of received Distress screen

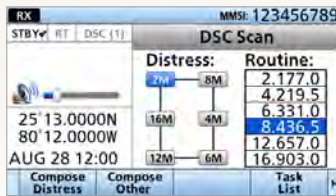

DSC Scan screen

## Intuitive User Interface

A combination of the large main dial and software keys at the bottom of the display, provides simple operation and easy access to often used functions. You can smoothly enter channel numbers, MMSI numbers, vessel names with the alpha-numeric keypad. In addition, one of software key functions can be assigned to the microphone's programmable button for quick access.



## 4.3 inch Wide Viewing Angle Color TFT Display

The 4.3 inch color TFT display provides an almost 180 degree very wide viewing angle and displays high resolution characters and function icons. You can clearly see the display information from various viewing angles. So the radio can be installed without choosing the installation place. The night mode display ensures good readability in low light conditions.




Night mode screen



Menu screen

## Integrated GPS Receiver

The GPS receiver which includes GPS, GLONASS and SBAS function, is integrated into the IC-M803. Your position data, course, speed and UTC data can be received with a simple connection to the supplied GPS antenna. The position data can be output from the NMEA 0183 port for use with other devices.

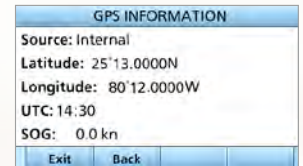

GPS Information screen

# Color TFT Display

## Two Minutes Instant Replay Memory

The Instant Replay function automatically saves the received audio. You can replay the received audio, and not miss any incoming calls.


## Advanced RF Direct Sampling System

The latest digital signal processing system is employed to the IC-M803. The system totally improves receiver sensitivity, and audio clarity over conventional radio systems.

## Ready for HF E-mail Operation

The IC-M803 can be set to memorize your HF e-mail access frequency, mode and bandwidth setting into the e-mail channels. Up to 160 e-mail frequency channels, and connection terminals for a PC and e-mail modem are available.

\*Please consult with an HF e-mail provider for details.

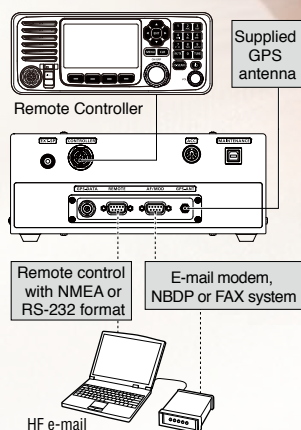

## And more

- 150 W (PEP) of powerful RF output
- Optional AT-140 automatic antenna tuner
- IPX7 waterproof remote controller
- 0.5–29.999 MHz continuous receiver coverage
- NMEA 0183 Version 4.10 data input/output (4800–38400 bps)

## MF/HF MARINE TRANSCEIVER IC-M803



## SPECIFICATIONS

GENERAL		
Frequency coverage	Receive	500 kHz–29.9999 MHz (Continuous)
	Transmit	1.6–2.9999, 4.0–4.9999, 6.0–6.9999, 8.0–8.9999, 12.0–13.9999, 16.0–17.9999, 18.0–19.9999, 22.0–22.9999, 25.0–27.5000 MHz
	DSC	2.1875, 4.2075, 6.3120, 8.4145, 12.5770, 16.8045 MHz
Mode	TX/RX	J3E (USB, LSB), J2B (AFSK), F1B (FSK), A1A (CW), H3E* (AM) (* H3E receive only)
	DSC	J2B
Antenna impedance		50 Ω (unbalanced)
Usable temperature range		–20°C to +55°C, –4°F to +131°F
Frequency stability	TX/RX	±10 Hz (below 29.999 MHz)
	DSC	±10 Hz
Power supply requirement		13.6 V DC ±15% (Negative ground)
Current drain (at 13.6 V DC)	Receive	Less than 3.0 A (Maximum audio output)
	Transmit	30 A (Maximum output power)
Dimensions (Projections not included)	Main unit	240 × 94 × 238 mm, 9.4 × 3.7 × 9.4 in (W × H × D)
	Controller	274 × 114 × 86 mm, 10.8 × 4.5 × 3.4 in (W × H × D)
Weight	Main unit	4.41 kg, 9.7 lb (approximate)
	Controller	760 g, 1.7 lb (approximate)

TRANSMITTER	
Output power	150, 100, 60, 20 W PEP (selectable)
Spurious emissions	Less than –62 dB (Peak output power)
Carrier suppression	More than 40 dB (Peak output power)
Unwanted sideband suppression	More than 55 dB (Peak output power with 1500 Hz AF Input)
Microphone impedance	600 Ω

RECEIVER			
Sensitivity		at 20 dB SINAD	at 10 dB S/N
J3E, A1A	0.5–1.5999 MHz	30 dBμV emf	16 dBμV
	1.6–1.7999 MHz	13 dBμV emf	–1 dBμV
	1.8–29.9999 MHz	8 dBμV emf	–6 dBμV
J2B, F1B	1.6–1.7999 MHz	4 dBμV emf	–10 dBμV
	1.8–29.9999 MHz	–1 dBμV emf	–15 dBμV
	0.5–1.5999 MHz	44 dBμV emf	30 dBμV
H3E	1.6–1.7999 MHz	30 dBμV emf	16 dBμV
	1.8–3.9999 MHz	24 dBμV emf	10 dBμV

DSC Sensitivity (J2B)		6 dBμV emf (at 20 dB SINAD) –8 dBμV (at 10dB S/N) –6 dBμV emf (at 1% BER)
-----------------------	--	---

Spurious response	TX/RX	More than 70 dB (0.5–29.9999 MHz)
	DSC	More than 70 dB

Audio output power		4.0 W at 10% distortion with a 4 Ω load
Clarity variable range		±150 Hz

All stated specifications are subject to change without notice or obligation.

## Applicable IP Rating

## Ingress Protection Standard

Remote controller	IPX7 (1 m depth water for 30 minutes)
-------------------	---------------------------------------

## Supplied accessories:

- Remote controller
- Remote control cable (5 m, 16.4 ft)
- Microphone, HM-214H
- DC power cable
- GPS antenna (5 m, 16.4 ft cable)
- Microphone hanger
- Mounting bracket kits
- ACC plugs
- Spare fuses

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.  
www.icomamerica.comIcom (Europe) GmbH  
www.icomeurope.comIcom (Australia) Pty. Ltd.  
www.icom.net.au

Your local distributor/dealer:

Icom Canada  
www.icomcanada.comIcom Spain S.L.  
www.icomspain.comIcom Brazil  
E-mail: sales@icombrasil.comIcom (UK) Ltd.  
www.icomuk.co.ukIcom France s.a.s.  
www.icom-france.com


**Mackay**  
Marine Electronics &  
Satellite Communications  
www.mackaymarine.com

**Mackay Marine – High Seas**  
+1 281 479 1515 marinesales@mackaymarine.com  
**Mackay Communications, Satellite Solutions**  
+1 919 850 3100 satserv@mackaycomm.com  
**Mackay Marine Canada**  
+1 902 469 8480 sales.canada@mackaymarine.com  
**Mackay Marine Alaska & Pacific Northwest**  
+1 206 282 8080 ballard@mackaymarine.com

Class D DSC VHF Radio  
with Integrated AIS Receiver

VHF MARINE TRANSCEIVER


## IC-M605

The IC-M803 is designed to be a companion to our VHF transceiver IC-M605.

The front panel layout, color TFT display and user interface are similar to each other. Take advantages of the shared functionality to complete your communications needs.



## OPTIONAL ACCESSORIES

AT-140  
AUTOMATIC ANTENNA  
TUNEROPC-1465 SHIELDED  
CONTROL CABLE  
for AT-140 (10 m, 32.8 ft)AH-710  
FOLDED DIPOLE  
ANTENNAMN-100  
ANTENNA MATCHER  
(8 m, 26.2 ft x 2 antenna wires)MN-100L  
ANTENNA MATCHER  
(15 m, 49.2 ft x 1 antenna wire)HM-214H  
HAND  
MICROPHONE  
(Same as supplied)SP-24  
EXTERNAL SPEAKERMB-75  
FLUSH MOUNT KIT