

Marine Display
MU Series

Model MU-152, MU-152HD, MU-192HD, MU-192, MU-270W



Discover our amazing range of monitors




MU-152

1024 x 768 (XGA) 15"



NEW MU-152HD

1024 x 768 (XGA) 15"



NEW MU-192HD

1280 x 1024 (SXGA) 19"

Superb quality Furuno monitors for your products

- ▶ Excellent vibration and shock resistant design.
- ▶ High-brightness, high-resolution LCD for colourful video presentation even in direct sunlight.
- ▶ Various format compatible input interfaces.
- ▶ Low-profile design for a neat and beautiful console.

A nice addition for your helm

For space-saving installation and additional security, flush mount installation is available for all the MU-Display series. The display unit can be fixed from either front or rear with the flush mount kit for MU-152/152HD/192HD/192/270W.




Waterproof and resistant


The MU-152/152HD/192HD has a waterproof display and is built to stand up to tough marine conditions when mounted at fly bridge console. The display can be rinsed with water for easy, worry-free cleaning.



ors



NEW MU-192
1280 x 1024 (SXGA) 19"

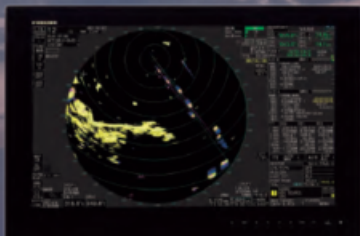

MU-270W
1920 x 1200 (WUXGA) 27"

Compact and lightweight


The MU-Display series is slim in depth, light weight, and is so compact that it fits right into virtually any console. Its space-saving design makes optimum use of your dashboard.

Optional easy to mount and adjustable bracket



The piano black glossy screen creates a stylish high-tech look on your helm

Specifications



	MU-152	MU-152HD	MU-192HD	MU-192	MU-270W
Screen size	15"	15"	19"	19"	27"
Resolution	1024 x 768 (XGA)	1024 x 768 (XGA)	1280 x 1024 (SXGA)	1280 x 1024 (SXGA)	1920 x 1200 (WUXGA)
Contrast	900 : 1	2500 : 1	2000 : 1	1000 : 1	1500 : 1
Viewing angle	±80°				
Brightness	Max 400 cd/m ²	Max 1,000 cd/m ²	Max 1,000 cd/m ²	Max 400 cd/m ²	Max 400 cd/m ²

Interface

Port	MU-152	MU-152HD	MU-192HD	MU-192	MU-270W
Port	Analog RGB x1, DVI-D x2, Composite x3	HDMI x1, Analog RGB x1, DVI-D x1, Composite x1	HDMI x1, Analog RGB x1, DVI-D x1, Composite x1		Analog RGB x1, DVI-D x2, Composite x1

Power Supply

Power Supply	MU-152	MU-152HD	MU-192HD	MU-192	MU-270W
Power Supply	12-24 VDC / 1.9 - 0.9 A	12-24 VDC / 2.5 - 1.3 A	12-24 VDC / 4.9 - 2.3 A	100-230 VAC / 0.4 - 0.3 A	100-230 VAC / 0.6 - 0.4 A


Environment

Environment	MU-152	MU-152HD	MU-192HD	MU-192	MU-270W
Ambient temperature	-15 °C ~ +55 °C				
Degree of protection	IP56 (Front Panel), IP22 (Rear)			IP22 (Front Panel & Rear)	


Parts

Standard	1. Display Unit 2. Installation Materials, Accessories and Spare Parts				
	Flush Mount Kit (for fixing at rear)	Flush Mount Kit (for fixing at rear)	Flush Mount Kit (for fixing at rear)	Flush Mount Kit (for fixing at front)	Flush Mount Kit (for fixing at front)
Option		<ol style="list-style-type: none"> Cable Assembly Bracket Assembly (w/ncbs) Hood Assembly Flush Mount Kit (for fixing at front) 		<ol style="list-style-type: none"> Cable Assembly Bracket Assembly Hood Assembly Dust Cover Flush Mount Kit (rear) 	<ol style="list-style-type: none"> Cable Assembly Bracket Assembly Hood Assembly Dust Cover Flush Mount Kit (rear)


MU-152HD
Flush Mount
4.5 kg 9.9 lb




Bracket Mount
6.9 kg 15.2 lb




MU-192HD
Flush Mount
6.6 kg 14.5 lb

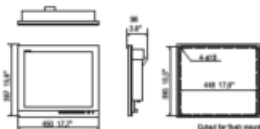


Bracket Mount
9.7 kg 21.3 lb




MU-152
Flush Mount 4.9 kg 10.8 lb

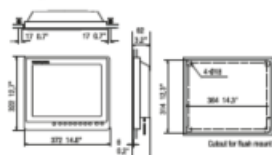


Bracket Mount 6.9 kg 15.2 lb

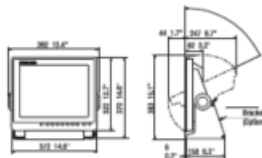


MU-192
Flush Mount 8.0 kg 17.6 lb

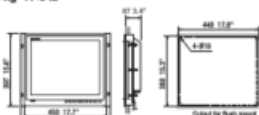


Bracket Mount 10.4 kg 22.9 lb

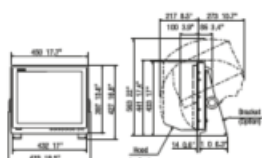

MU-270W
Bracket Mount
21 kg 46.3 lb

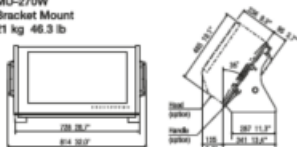

Flush Mount
13 kg 28.7 lb

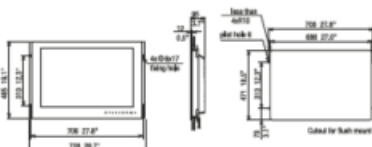

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE