



Inmarsat Mini-C Mobile Terminal for Ship Security Alert System

JUE-95SA




Features

- Full meets requirements for IMO Ship Security Alert System (SSAS)
- [SOLAS XI-2/6, IMO MSC.136 (76) / MSC.147(77)]
- One single antenna coaxial cable installation
- Small size and light weight antenna
- Built-in GPS receiver
- Easy installation



Japan Radio Co., Ltd.


● CONFIGURATION

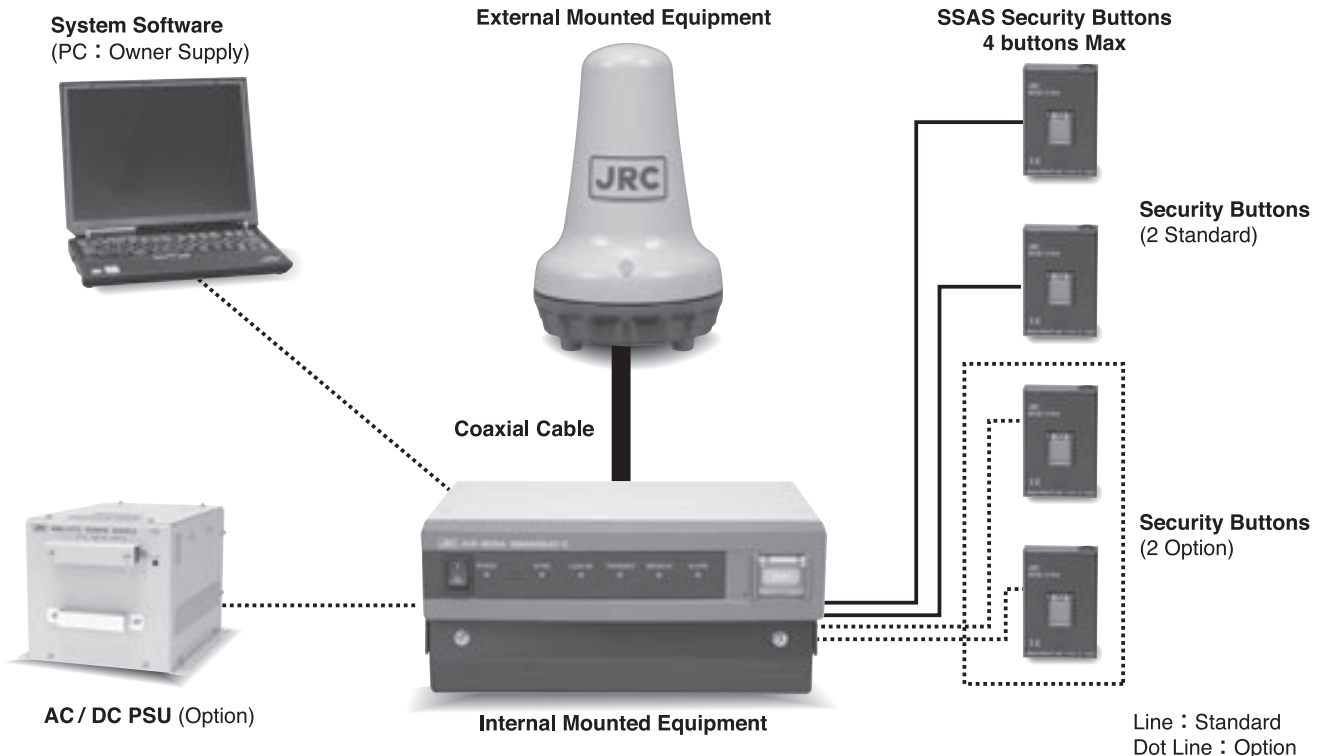

● SPECIFICATION

Frequency Range	TX	1626.5 ~ 1646.5 MHz
	RX	1530.0 ~ 1545.0 MHz
	GPS	1575.42 MHz ±1MHz
Channel Spacing		5KHz
Output Power		E.I.R.P. +7~+16 dBW
Receiving Performance		G / T (EL=5 Deg.) -23.7 dB / K 以上
Modulation	TX	1200 symbols / sec. BPSK
	RX	1200 symbols / sec. BPSK
Data rate	TX	600 bps
	RX	600 bps
Communication		Telex / Packet / Data / Fax (TX)
Power Supply		24V DC+30% -20%
		100 / 115 / 220V AC±10% (Option)

● DIMENSIONS

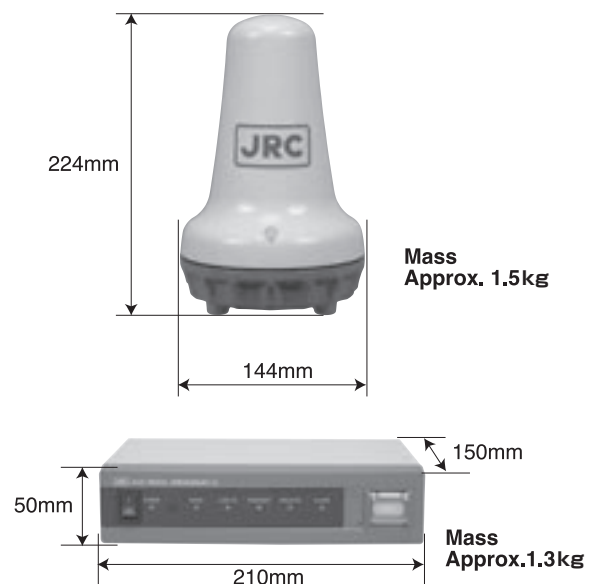

For further information, contact:



Since 1915

Japan Radio Co., Ltd.

URL <http://www.jrc.co.jp/>

Main Office: Nittochi Nishi-Shinjuku bldg.
10-1, Nishi-Shinjuku 6-chome
Shinjuku-ku, Tokyo 160-8328, Japan
Telephone: +81-3-3348-4099
Facsimile: +81-3-3348-4139

Overseas Branches : Seattle, Amsterdam
Liaison Offices : Taipei, Manila, Jakarta, Singapore,
Hanoi, New York, Athens